

532 Rec'd PCT/PTC 26 SEP 2000

FORM PTO-1380  
REV. 5-93U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICEATTORNEYS DOCKET NUMBER  
**P00,0703****TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

**09/647021**INTERNATIONAL APPLICATION NO.  
**PCT/DE99/01318**INTERNATIONAL FILING DATE  
**03 MAY 1999**PRIORITY DATE CLAIMED  
**29 MAY 1998**

TITLE OF INVENTION

**METHOD FOR DETERMINING THE POSITION OF DEFECTIVE SHIELDING OF A COAXIAL CABLE  
OR CONNECTOR IN A COAXIAL CABLE NETWORK**

APPLICANT(S) FOR DO/EO/US

**ROLF BLOCK**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay.
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of International Application as filed (35 U.S.C. 371(c)(2)) - drawings attached.
6. ☒ ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
7. ☒ ☐ has been transmitted by the International Bureau.
8. ☒ ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
9. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)) - drawings attached.
10. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3))
11. ☐ ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
12. ☐ ☐ have been transmitted by the International Bureau.
13. ☐ ☐ have not been made; however, the time limit for making such amendments has NOT expired.
14. ☐ ☐ have not been made and will not be made.
15. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
16. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
17. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

1. ☒ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, References, Search Report).
2. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.  
(SEE ATTACHED ENVELOPE) - Appointment of Associate Power of Attorney Attached.
3. ☒ Amendment "A" Prior to Action
4. ☐ A SECOND or SUBSEQUENT preliminary amendment.
5. ☐ A substitute specification.
6. ☒ A change of address letter attached to the Declaration.
7. ☒ Other items or information:
8. ☒ Request for Approval of Drawing Changes, 1 sheet of drawings, Figures 1, 2A, 2B.
9. ☒ Appointment of Associate Power of Attorney
10. ☒ EXPRESS MAIL # EJ220499387US dated September 26, 2000.

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.53) **097647021**INTERNATIONAL APPLICATION NO  
**PCT/DE99/01318**ATTORNEY'S DOCKET NUMBER  
**P00,0703**17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO ..... \$840.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) . . \$670.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but  
international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) ..... \$760.00Neither international preliminary examination fee (37 C.F.R. 1.482) nor international  
search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO ..... \$970.00International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all  
claims satisfied provisions of PCT Article 33(2)-(4) ..... \$ 96.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS

PTO USE ONLY

\$ 840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate	
Total Claims	08 - 20 =	0	X \$ 18.00	\$
Independent Claims	01 - 3 =	0	X \$ 78.00	\$
Multiple Dependent Claims			\$260.00 +	\$

**TOTAL OF ABOVE CALCULATIONS =**

\$ 840.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also  
be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

**SUBTOTAL =**

\$ 840.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(f)).

\$

**TOTAL NATIONAL FEE =**

\$ 840.00

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property

+

**TOTAL FEES ENCLOSED =**

\$ 840.00

Amount to be refunded	\$
charged	\$

a. ☒ A check in the amount of \$ 840.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 501519. A duplicate copy of this sheet is enclosed.NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be  
filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

SCHIFF HARDIN & WAITE  
PATENT DEPARTMENT  
6600 Sears Tower  
233 South Wacker Drive  
Chicago, Illinois 60606-6473

SIGNATURE

Mark Bergner  
NAME

45,877  
Registration Number

-1-

BOX PCT

IN THE UNITED STATES DESIGNATED/ELECTED OFFICE  
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE  
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

**AMENDMENT "A" PRIOR TO ACTION**

APPLICANT(S): Rolf Block  
ATTORNEY DOCKET NO.: P00,0703  
INTERNATIONAL APPLICATION NO.: PCT/DE99/01318  
INTERNATIONAL FILING DATE: 03 May 1999

10

INVENTION: "METHOD FOR DETERMINING THE POSITION OF  
DEFECTIVE SHIELDING OF A COAXIAL CABLE OR  
CONNECTOR IN A COAXIAL CABLE NETWORK"

Assistant Commissioner for Patents  
Washington, D.C. 20231

15

Sir:

Applicant herewith amends the above-referenced PCT application, and  
requests entry of the Amendment prior to examination in the United States  
National Examination Phase.

**IN THE SPECIFICATION:**

20

On pages 1-11, at the top of the pages, delete "GR 98 P 1822";

On page 1, cancel the title and text above line 7, and insert the following  
above line 7:

--TITLE

**METHOD FOR DETERMINING THE POSITION OF DEFECTIVE  
SHIELDING OF A COAXIAL CABLE OR CONNECTOR IN A COAXIAL  
CABLE NETWORK**

25

**BACKGROUND OF THE INVENTION**

09/647021-092600

The present invention relates to a method for determining the position of defective shielding of a coaxial cable or connector in a coaxial cable network.--; in line 28, after "laying" insert --the cables--.

On page 2, in line 5, cancel "cable, in" substitute --cable. In-- therefor; cancel lines 30-33, substitute the following at line 30:

**--SUMMARY OF THE INVENTION**

It is an object of the present invention to determine the position of the defective shielding of a coaxial cable more precisely.

This object is achieved in accordance with the present invention in a method for determining a position of defective shielding of a coaxial cable, said method comprising the steps of:

coupling to the coaxial cable a first signal and a second signal, said first signal having a first frequency and modulated by a first sound signal having a first sound frequency, said second signal having a second frequency higher than said first frequency and modulated by a second sound signal having a second sound frequency different than said first sound frequency;

guiding a receiver designed for receiving said first and second signals along said coaxial cable;

when said first signal is received, acoustically reproducing said first sound signal for indicating said defective shielding in a region; and

when said second signal is received, acoustically reproducing said second sound signal for establishing said position of said defective shielding.--;

in line 35, preceding "invention" insert --present--.

On page 3, in line 14, cancel "In an advantageous manner, the first"; below line 14, begin a new paragraph with:

--In an embodiment, the first--;

in line 18, cancel "- claim 2. The" substitute --. In an embodiment, the--

therefor;

in line 22, cancel the hyphen, and after "operated" insert a comma;

in line 23, cancel "claim 3 -".

On page 3a, cancel lines 1-2, substitute the following at line 1:

5 --In an embodiment,--.

On page 4, in line 1, cancel "- claim 5";

in line 11, after "device" insert a comma, and cancel the hyphen;

in line 12, after "telephone" insert a comma, and cancel the hyphen;

cancel lines 14-15, substitute the following at line 14:

10 --In an embodiment, the transmission level of--;

in line 19, cancel "- claim 6";

in line 21, after "plugs" insert a comma, and after "20 dB" insert a comma,  
and cancel the first and second hyphens;

cancel lines 23-24, substitute the following at line 23:

15 --In an embodiment, the--;

in line 25, after "integrated" insert a period, and cancel the hyphen;

in line 26, cancel "claim 7.", and cancel "In these methods" substitute --  
According to this method" therefor, and after "range" insert a  
comma;

20 in line 27, after "Hz" insert a comma, and cancel the first and second  
hyphens;

in line 33, after "loudspeaker" insert a comma, and after "enabled" cancel  
the comma;

cancel lines 36-38, substitute the following at line 36:

25 -- These and other features of the invention(s) will become clearer with  
reference to the following detailed description of the presently preferred  
embodiments and accompanied drawings.

#### **DESCRIPTION OF THE DRAWINGS**

Figure 1 is a block diagram of an arrangement for carrying out the method

according to the present invention in a coaxial cable network.

Figure 2A is a block diagram showing the essential elements of a receiver according to the present invention.

Figure 2B is a block diagram showing the operator interface of a receiver  
5 according to the present invention.

**DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED**  
**EMBODIMENTS--.**

Cancel page 4a.

On page 5, cancel lines 1-5;

10 in line 14, cancel "- not" substitute --(not-- therefor;  
in line 15, after "illustrated" insert a --)--, and cancel "S1, S2" substitute --  
s1, s2-- therefor;  
in line 16, preceding "invention" insert --present--;  
in line 18, cancel "S" substitute --T-- therefor;  
15 in line 20, cancel "S" substitute --T-- therefor;  
in line 22, cancel "S1" substitute --s1-- therefor;  
in line 24, cancel "S2" substitute --s2-- therefor;  
in line 29, cancel "S2" substitute --s2-- therefor.

On page 6, in line 3, after "cable" insert --K--;

20 in line 9, cancel "- not illustrated -" substitute --(not illustrated)-- therefor,  
and cancel "s1" substitute --s2-- therefor;  
in line 26, after "AWE" insert --, which is--, and cancel the hyphen;  
in line 27, after "speaker" insert a comma, and cancel the hyphen;  
in line 37, after "EE" insert --, which is--, and cancel the hyphen;  
25 in line 38, after "keypad" insert a comma, and cancel the hyphen.

On page 6a, in line 2, after "AZE" insert --, which is--, and cancel the  
hyphen, and after "display" insert a comma;

5

10

-- Although modifications and changes may be suggested by those of ordinary skill in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.--

**IN THE CLAIMS:**

On page 9, in line 2, cancel "Patent claims" substitute --**I CLAIM AS MY INVENTION:**-- therefor.

Please cancel claims 1-7.

5 Please add the following new claims 8-15:

8. A method for determining a position of defective shielding of a coaxial cable, said method comprising the steps of:

coupling to the coaxial cable a first signal and a second signal, said first  
signal having a first frequency and modulated by a first sound  
10 signal having a first sound frequency, said second signal having a  
second frequency higher than said first frequency and modulated  
by a second sound signal having a second sound frequency  
different than said first sound frequency;  
guiding a receiver designed for receiving said first and second signals  
15 along said coaxial cable;  
when said first signal is received, acoustically reproducing said first sound  
signal for determining a region of said defective shielding; and  
when said second signal is received, acoustically reproducing said second  
sound signal for determining said position of said defective  
20 shielding.

9. The method as claimed in claim 8, wherein said first frequency of  
said first signal is in a range of 100 to 200 MHz; and wherein said second  
frequency of said second signal is in an upper transmission range of said coaxial  
cable.

25 10. The method as claimed in claim 8, wherein said second frequency  
of said second signal has a value such that said position of said defective shielding  
of said coaxial cable can be determined when said coaxial cable has been installed  
and operated.



11. The method as claimed in claim 8, wherein said coaxial cable is provided in a television distribution network wherein television signals in a range of from 80 to 862 MHz are transmitted; and wherein said second frequency of said second signal is in a range of from one of 750 to 990 MHz or 400 to 500 MHz.

5 12. The method as claimed in claim 8, wherein said first frequency of said first signal and said second frequency of said second signal have values such that an amateur radio receiver designed for a simultaneous reception of two signals can be used as said receiver for a simultaneous reception of said first signal and said second signal.

10 13. The method as claimed in claim 8, further comprising the step of: matching a transmission level of said first signal and said second signal to reception properties of said receiver.

14. The method as claimed in claim 8, further comprising the step of: optionally integrating the "Sub Audio Squelch" method.

15 15. The method as claimed in claim 8, further comprising the step of: attenuating said first signal and said second signal received in said receiver.

2025-12-10 10:00:00

**IN THE ABSTRACT:**

On page 11, cancel lines 1-5, insert the following centered heading at line 1:

**--ABSTRACT OF THE DISCLOSURE--;**

cancel lines 6-19, substitute the following Abstract of the Disclosure at line 6:

-- A first signal modulated by a first sound signal and having a first frequency and a second signal modulated by a second sound signal and having a second higher frequency are coupled into a coaxial cable. When the first signal is received in a receiver, defective shielding in a region is indicated by acoustic reproduction of the first sound signal and, when the second signal is received, the position of the defective shielding is indicated by acoustic reproduction of the second sound signal.--.

**REMARKS:**

The present Amendment revises the specification, drawings and claims to conform to United States patent practice, before examination of the present PCT application in the United States National Examination Phase. All of the changes are editorial and no new matter is added thereby. Claims 1-7 have been canceled. New claims 8-15 are patentably distinguishable from the known prior art.

Early examination on the merits is respectfully requested.

Respectfully submitted,

  
\_\_\_\_\_  
Mark Bergner (Reg. No. 45,877)  
SCHIFF HARDIN & WAITE  
PATENT DEPARTMENT  
6600 Sears Tower  
Chicago, Illinois 60606-6473  
(312) 258-5779  
Attorney for Applicants

1/ppts 430 Rec'd PCT/PTO 26 SEP 2000

## Description

Method for determining the position of defective shielding of a coaxial cable or connector in a coaxial cable network.

Television distribution networks, also known to experts as CATV networks are predominantly realized by coaxial cables or coaxial cable networks in which, in order to avoid the radiation of the transmitted television signals, one or two metallic shields - usually aluminum foil, but also copper foil or braiding - surrounds or surround the information conductors - i.e. inner conductors. The shielding is preferably connected to the local ground potential layer.

During the installation of such coaxial cable networks, in particular television distribution networks, technically inappropriate laying and technically inappropriate handling mean that the shielding of the coaxial cables incurs damage or high contact resistances arise due to faulty assembly of the connectors. The damage to the shielding is either a destroyed shielding or is constituted by slits in the shielding which are produced during the laying of the coaxial cables as a result of excessively small bending radii, excessively high mechanical stress or as a result of major movements or deformations caused after installation - in particular in the case of laying in the open.

Prior to use of the coaxial cable networks or in the event of complaints concerning excessively low quality of the communicated television signals or radiation of signals in the return channel frequency range, the coaxial cable networks are checked for defective shielding - also called leakage points by experts - as a result of which the television signals to be transmitted are radiated into the open and external signals penetrate into the coaxial cable and

09647021-092500

interfere with the television signals or return channel signals.

09647021.092500

In order to find such leakage points or the position of defective shielding of a coaxial cable, a signal having a frequency of approximately 130 MHz, modulated with a sound signal, is coupled into the coaxial cable, in this case, the frequency chosen lies in the lower region of the frequency range provided for the television distribution. A receiver tuned to the coupled-in signal is in each case guided along the coaxial cable to be examined and is observed in respect of reception of the coupled-in signal. In this case, in particular the measured field strength of a received, coupled-in signal is used to judge the position of the defective shielding of the respective coaxial cable. In principle, the higher the measured field strength, the closer the position of the defective shielding. A further criterion for determining the position of the defective shielding is the sound signal, which is acoustically reproduced after demodulation of a received signal. With this measurement method, the position of defective shielding can be delimited only to a region of approximately 20 m, since the sheath wave produced by the defective shielding propagates 10 to 20 m on the shielding in both directions - given the use of a coupled-in test signal of approximately 130 MHz - as depends on the surroundings of the coaxial cable, e.g. masonry, concrete or steel support - and said sheath wave is received with a different field strength in this region by the receiver and the sound signal is acoustically reproduced.

The object on which the invention is based is to determine the position of the defective shielding of a coaxial cable more precisely. The object is achieved by means of the features of patent claim 1.

The essential aspect of the method according to the invention is to be seen in the fact that a first signal modulated by a first sound signal and having a first frequency and a second signal modulated by a second sound signal and having a

second frequency are coupled into the coaxial cable, where the second frequency is higher than the first frequency and the sound signals have a different sound frequency. A receiver designed for the reception of the

5 two signals is guided along the coaxial cable, and when the first signal is received, the first sound signal is acoustically reproduced, thereby indicating defective shielding in a region, and when the second signal is

10 reproduced, thereby establishing the position of the defective shielding. When both signals are received simultaneously, both sound signals are audible when the position of the defective shielding of the coaxial cable is found. In an advantageous manner, the first

15 frequency of the first signal is chosen to be in the range of 100 to 200 MHz and the second frequency of the second signal is chosen to be in the upper transmission range of the coaxial cable - claim 2. The second frequency of the second signal is advantageously chosen

20 in such a way that the determination of the defective shielding of the coaxial cable can be carried out when the coaxial cable has been installed and operated - claim 3 - e.g. including between sound carrier and upper adjacent vision carrier. By coupling in a second

25 signal which is modulated by a second sound signal and whose frequency lies in the range of the operating frequencies, that is to say in the range of the frequency of the television signals, once the 10 to 20 m region has been found, the position of the

30 defective shielding of the coaxial cable to be checked can be localized significantly more precisely, since, in the event of defective shielding, because of the significantly higher frequency and hence higher sheath wave attenuation, the second signal propagates on the

35 coaxial cable in a very small region, that is to say a region measured in centimeters, and is otherwise radiated into the free space.

ORIGINAL - 000000

According to a particularly advantageous development of the method according to the invention, the frequencies of the first and second signals are chosen in such a way that an amateur radio receiver  
5 designed for the simultaneous reception of two signals can be used as the receiver for the reception

09247021-092600

manipulability, these amateur radio receivers can easily be guided along the coaxial cables to be checked and, at the same time, the field strength can be observed and the acoustically reproduced first and second sound signals can be monitored. Furthermore, this amateur radio receiver can advantageously be used additionally as a local communications device - for example as a construction site telephone - in the cable networks, which are usually spread out geographically.

15 according to the invention, the transmission level of  
the first and second signals is matched to the  
reception properties of the receiver and/or the  
received signals (s1, s2) are attenuated in the  
receiver - claim 6. For attenuating the received  
20 signals in the receiver, it is possible to insert  
attenuation plugs - e.g. 80 ohms, 20 dB - into the  
antenna.

According to a further advantageous refinement of the method according to the invention, the Sub Audio Squelch method is optionally integrated - claim 7. In these methods, a lower audiofrequency range - e.g. 0-300 Hz - is suppressed and a tone or pilot tone having a frequency of 85.4. Hz provided in the case of amateur radio equipment, for example, is transmitted. If this transmitted tone is received with a sufficient level in the receiver, the acoustic reproduction device, that is to say amplifier and loudspeaker is enabled, or inhibited in the event of an insufficient level - referred to as squelch function by experts.

The method according to the invention is explained in more detail below with reference to two drawings, in which:

45601-45603 = 45602



Figure 1 shows an arrangement for carrying out the method according to the invention in a coaxial cable network,

09647021-096600

Figure 2A shows, in a block diagram, the essential components of a receiver according to the invention and

Figure 2B shows the operator interface of a receiver  
5 according to the invention.

Figure 1 shows part of a coaxial cable network KN, which usually has a tree structure and is represented by a coaxial cable K. The coaxial cable K is represented by two lines drawn parallel and a dashed  
10 line indicating the inner conductor. During operation, television signals fs are transmitted via the coaxial cable K or via the coaxial cable network KN to transfer points - television connection boxes (not illustrated) - and from there are forwarded to TV devices - not  
15 illustrated. For coupling in the signals S1, S2 according to the invention, a coupler KP or the collector array of a TV head end is inserted into the coaxial cable K. A transmitter S is connected to said coupler KP via a coaxial line KL. Two signal generators  
20 G1 and G2 are contained in said transmitter S. For the exemplary embodiment, it shall be assumed that a first signal S1 having a first frequency f1 = 130 MHz is formed in the first signal generator G1. This first signal S1 is frequency-modulated with a first sound  
25 signal ts1 and with a first sound frequency tf1 = 400 Hz, with a 2 kHz swing. Analogously to this, a second signal S2 having a second frequency f2 = 750 to 990 MHz or 400 to 500 MHz is formed in the second signal generator G2. The second signal S2 is  
30 frequency-modulated with a second sound signal ts2 with a second sound frequency tf2 = 1 kHz, with a 2 kHz swing. Both the first signal s1 and the second signal s2 are coupled into the coaxial line KL via the coupler KP. For the exemplary embodiment, it shall be assumed  
35 that the two signals s1, s2 are transmitted into the coaxial cable K in the direction indicated by the dotted line provided with an arrow. For the exemplary embodiment, it shall furthermore be assumed that the

006647021-096600

shielding S is defective at the position P identified by P - indicated by the designation S(d) in Figure 1. On account of this defective shielding S(d),

09647021-092600

part of the transmitted energy of the signals  $s_1$ ,  $s_2$  escapes from the coaxial cable K and propagates on the outer conductor along the coaxial cable. This propagation is referred to as the sheath wave mw by experts. The sheath wave mw of the first signal  $s_1$  having the lower frequency  $f_1$  propagates, given a sufficient level, approximately 10 to 20 m in both directions of the defective shielding S(d). The sheath wave - not illustrated - of the second signal  $s_1$  propagates only a couple of centimeters on account of the considerably higher frequency  $f_2$ . This very small region is established as position P, since damage or a defect of the coaxial cable K or of the shielding S can easily be found once the said small region has been determined.

Figure 2A shows the fundamental structure of the receiver E in a block diagram. An antenna A is connected to two reception units EE1, EE2, the first reception unit EE1 being tuned to the reception of the first signal  $s_1$  and the second reception unit EE2 being tuned to the reception of the second signal  $s_2$ . If a first signal  $s_1$  with a sufficient level is received in the first reception unit EE1, then, after frequency demodulation and sound demodulation, a first sound signal  $ts_1$  is passed to an acoustic reproduction device AWE - formed by an amplifier and a connected loud speaker - where it is reproduced acoustically. Analogously to this, in the second reception unit EE2, when a second signal  $s_2$  is received, said signal is subjected to frequency demodulation and sound demodulation and a second sound signal  $ts_2$  is likewise passed to the acoustic reproduction device AWE, where it is reproduced. The receiver E furthermore contains a control unit ST, which monitors all the components of the receiver E and with the aid of which the frequency setting of the two reception units EE1, EE2 is performed. An input unit EE - usually realized by a keypad - is provided for the inputting of the

corresponding reception frequencies  $f_2$ ,  $f_2$ . A display unit AZE - usually realized by a liquid crystal display

-

09547021.092600

0925 in "The 4 Seasons"

5

20

25

30

35

region B encompassing a number of meters is determined and then, by the receiver E being guided precisely along the coaxial cable K, the position P of the defective shielding S(d) can be determined precisely.

- 5           In order to avoid the acoustic reproduction of noise given the lack of reception of the two signals s1, s2, the method which is referred to as "Sub Audio Squelch" by experts can be integrated both in the transmitter S and the receiver E. Amateur radio
- 10 receivers E usually have this performance feature. In this case, the lower sound frequency range - for example between zero and 300 Hz - is used in order to transmit a sound signal having a frequency of 85.4Hz. In the receiver, this sound signal is used to activate
- 15 or inactivate the acoustic reproduction device AWE. If this specific sound signal is received with a sufficient level, the acoustic reproduction unit AWE is activated, otherwise it remains deactivated.

00517021.002500

## Patent claims

1. A method for determining the position (P) of  
5 defective shielding (S(d)) of a coaxial cable (K),
- in which a first signal (s1) modulated by a first sound signal (ts1) and having a first frequency (f1) and
  - 10 - a second signal (s2) modulated by a second sound signal (ts2) and having a second frequency (f2) are coupled into the coaxial cable (K),
  - where the second frequency (f2) is higher than the first frequency (f1) and the sound signals (ts1, ts2) have a different sound frequency (tf1, tf2),
  - 15 - in which a receiver (E) designed for the reception of the two signals (s1, s2) is guided along the coaxial cable (K), and
  - 20 -- when the first signal (s1) is received, the first sound signal (ts1) is acoustically reproduced, thereby indicating defective shielding (S(d)) in a region (B), and
  - 25 -- when the second signal (s2) is received, the second sound signal (ts2) is acoustically reproduced, thereby establishing the position (P) of the defective shielding (S(d)).
2. The method as claimed in claim 1, characterized  
30 in that the first frequency (f1) of the first signal (s1) is chosen to be in the range of 100 to 200 MHz and the second frequency (f2) of the second signal (s2) is chosen to be in the upper transmission range of the coaxial cable (K).
- 35 3. The method as claimed in either of claims 1 and 2, characterized in that the second frequency (f2) of the second signal (s2) is chosen in such a way that the determination of

05647371-056600



the defective shielding (S(d)) of the coaxial cable (K) can be carried out when the coaxial cable (K) has been installed and operated.

2025 RELEASE UNDER E.O. 14176

4. The method as claimed in one of the preceding claims, characterized

in that the coaxial cable (K) is provided in a television distribution network and television signals (fs) in the range of from 80 to 862 MHz are transmitted, and in that the second frequency (f2) of the second signal (s2) lies in the range of from 750 to 990 MHz or from 400 to 500 MHz.

5. The method as claimed in one of the preceding  
10 claims, characterized

in that the first and second frequencies (f1, f2) of the first and second signals (s1, s2) are chosen in such a way that an amateur radio receiver designed for the simultaneous reception of two signals (s1, s2) can be used as the receiver (E) for the simultaneous reception of the two signals (s1, s2).

6. The method as claimed in one of the preceding claims, characterized

in that the transmission level of the first and second  
20 signals (s1, s2) is matched to the reception properties  
of the receiver (E) and/or the received signals  
(s1, s2) are attenuated in the receiver (E).

7. The method as claimed in one of the preceding claims, characterized

25 in that the "Sub Audio Squelch" method is optionally  
integrated.




# Abstract

Method for determining the position of defective shielding of a coaxial cable or connector in a coaxial cable network

A first signal (s1) modulated by a first sound signal (ts1) and having a first frequency (f1) and a second signal (s2) modulated by a second sound signal (ts2) and having a second higher frequency (f2) are coupled into the coaxial cable (K). When the first signal (s1) is received in a receiver (E) defective shielding (S(d)) in a region (B) is indicated by acoustic reproduction of the first sound signal (ts1) and, when the second signal (s2) is received, the position (P) of the defective shielding (S(d)) is indicated by acoustic reproduction of the second sound signal (ts2).

Figure 1

05647031-333000

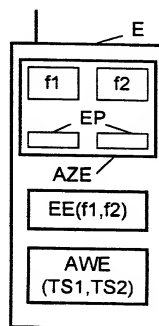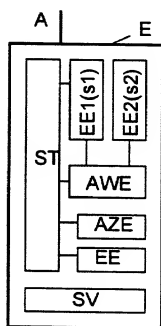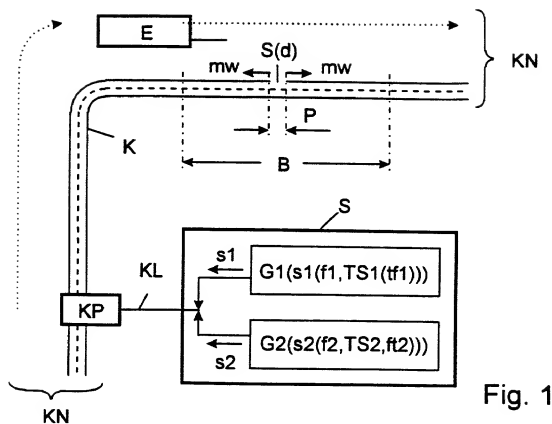

09/647021

430 Rec'd PCT/PTO 26 SEP 2000

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CHANGE OF ADDRESS OF APPLICANTS' REPRESENTATIVE

APPLICANT(S): Rolf Block  
ATTORNEY DOCKET NO.: P00,0703  
INTERNATIONAL APPLICATION NO: PCT/DE99/01318  
INTERNATIONAL FILING DATE: 03 May 1999

INVENTION: **METHOD FOR DETERMINING THE POSITION OF DEFECTIVE SHIELDING  
OF A COAXIAL CABLE OR CONNECTOR IN A COAXIAL CABLE NETWORK**

Assistant Commissioner for Patents,  
Washington, D.C. 20231

S I R:

Members of the firm of Hill & Simpson designated on the original Power of Attorney have merged into the firm of Schiff Hardin & Waite. All future correspondence for the above-referenced application therefore should be sent to the following address:

**SCHIFF HARDIN & WAITE**  
**Patent Department**  
**6600 Sears Tower**  
**233 South Wacker Drive**  
**Chicago, Illinois 60606-6473**

Submitted by,

*Mark Bergner*

(Reg. No. 45,877)

Mark Bergner  
SCHIFF HARDIN & WAITE  
Patent Department  
6600 Sears Tower  
Chicago, Illinois 60606-6473  
Telephone: (312) 258-5779  
Attorneys for Applicants

Date: September 26, 2000

09/647021-032600

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

Verfahren zur Ermittlung der Position  
einer defekten Schirmung eines  
Koaxialkabels oder Steckverbinders in  
einem Koaxialkabelnetz

deren Beschreibung

(zutreffendes ankreuzen)

☒ hier beigefügt ist.

☐ am \_\_\_\_\_ als

PCT internationale Anmeldung

PCT Anmeldungsnummer \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_

abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschließlich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

the specification of which

(check one)

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as

PCT international application

PCT Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a)

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# German Language Declaration

Prior foreign applications  
Priorität beansprucht

Priority Claimed

198 24 157.7 Germany 29. Mai 1998  
(Number) (Country) (Day Month Year Filed)  
(Nummer) (Land) (Tag Monat Jahr eingereicht)

☒ ☐  
Yes No  
Ja Nein

                                                                
(Number) (Country) (Day Month Year Filed)  
(Nummer) (Land) (Tag Monat Jahr eingereicht)

☐ ☐  
Yes No  
Ja Nein

                                                                
(Number) (Country) (Day Month Year Filed)  
(Nummer) (Land) (Tag Monat Jahr eingereicht)

☐ ☐  
Yes No  
Ja Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

                      
(Application Serial No.)  
(Anmeldeseriennummer)

                      
(Filing Date)  
(Anmeldedatum)

                      
(Status)  
(patentiert, anhängig,  
aufgegeben)

                      
(Status)  
(patented, pending,  
abandoned)

                      
(Application Serial No.)  
(Anmeldeseriennummer)

                      
(Filing Date)  
(Anmeldedatum)

                      
(Status)  
(patentiert, anhängig,  
aufgeben)

                      
(Status)  
(patented, pending,  
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon

09547001-09260

# German Language Declaration

VERRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

19

And I hereby appoint

Messrs. John D. Simpson (Registration No. 19,842), Lewis T. Steadman (17,074), William C. Stueber (16,453), P. Phillip Connor (19,259), Danna A. Gross (24,410), Marvin Moody (16,549), Steven H. Noll (28,982), Brett A. Valiquet (27,841), Thomas I. Ross (29,275), Kevin W. Guynn (29,927), Edward A. Lehmann (22,342), James D. Hobart (24,149), Robert M. Barrett (30,142), James Van Santen (18,584), J. Arthur Gross (13,815), Richard J. Schwarz (13,472) and Melvin A. Robinson (31,870), David R. Metzger (32,919), John R. Garrett (27,888) all members of the firm of Hill, Steadman & Simpson, A Professional Corporation.

Telefongespräche bitte richten an:  
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

312/876-0200

Ext. \_\_\_\_\_

Postanschrift:

Send Correspondence to:

HILL, STEADMAN & SIMPSON  
A Professional Corporation  
85th Floor Sears Tower, Chicago, Illinois 60606

Voller Name des einzigen oder ursprünglichen Erfinders: <b>BLOCK, Rolf</b>		Full name of sole or first inventor:	
Unterschrift des Erfinders <i>Rolf Block</i>	Datum <i>16.3.99</i>	Inventor's signature	Date
Wohnsitz <b>D-81245 München, Germany</b>		Residence	
Staatsangehörigkeit <b>Bundesrepublik Deutschland</b>		Citizenship	
Postanschrift <b>Krähenekstr. 6</b>		Post Office Address	
<b>D-81245 München</b>			
<b>Bundesrepublik Deutschland</b>			
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).